

21:9 Cinematic View

ULTRA WIDE SCREEN DIGITAL SIGNAGE 29WR30

29WR30 29W"



21:9 IMMERSIVE CINEMATIC VIEW

An aspect ratio of 21:9 which perfectly fit to cinema screen, enables you to concentrate on movie itself. "No shadow box" enable to immerse you in the cinema.

29WR30 21:9



Conventional 16:9



VARIOUS SCREEN UTILIZATION


You can use 16:9 area conventional movie streaming without any image distortion and extra 5:9 zone for information noticing. When you display two 4:3 contents on the 29WR30 screen half by half, distortion minimized.

- 16:9 zone for movie streaming
- 5:9 zone for information noticing



MAXIMIZE THE UTILIZATION OF SPACE

Even in a restricted space, such as a store shelf or low ceiling interior, 29WR30 can boast eye-catching effect with high efficient without obstructing movement of human traffic.

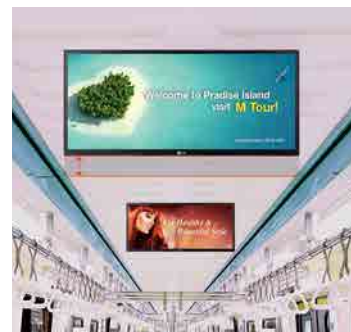

ULTRA WIDE SCREEN DIGITAL SIGNAGE

29WR30 29W"

29WR30 29W"



FEATURES

- 21:9 Cinema Screen
- Native Resolution : 2,560 x 1,080 (WFHD)
- sRGB 100%
- Easy Contents Creation & Easy Maintenance with accompanying function

SPECIFICATIONS

		29WR30					
PANEL	Screen Size	29"		PHYSICAL SPECIFICATION	Bezel Width	ON BEZEL : 13mm(Top), 18mm(Bottom), 12.4mm(Left/Right) 0.51in(Top), 0.70in(Bottom), 0.48in(Left/Right)	
	Panel Technology	IPS			OFF BEZEL : 1mm(Top),16.8mm(Bottom),1mm(Left/Right) 0.03in(Top), 0.66in(Bottom), 0.03in(Left/Right)		
	Aspect Ratio	21 : 9			Monitor Dimension (W x H x D)	697.2 x 313.2 x 50.95(mm) / 27.44 x 12.33 x 2.00(in)	
	Native Resolution	2,560 x 1,080 (WFHD)			Weight (head)	7.2Kg / 15.9lbs	
	Brightness	300nit			Packing Dimension (W x H x D)	777 x 385 x 155(mm) / 30.59 x 15.15 x 6.10(in)	
	Contrast Ratio	1,000 : 1			Packing Weight	8.9Kg / 19.6lbs	
	Dynamic Contrast Ratio	5,000,000 : 1			VESA™ Standard Mount Interface	200 x 200	
	Viewing Angle (H x V)	178 x 178			SPECIAL FEATURES	Additional	
	Response Time	Max. 5ms (G to G)			ENVIRONMENT CONDITIONS	Operation Temperature	0°C to 40°C / 32°F to 104°F
	CONNECTIVITY	Input			Operation Humidity	10% to 80%	
Digital		HDMI(1), DVI-D(1) Displayport(1) with HDCP for all input		POWER	Power Supply	90-240V~, 50/60Hz	
Analog		No		Power Consumption	Typical / Smart Energy Saving	53W (Typ) / 40W (SES)	
Audio		Yes(1)		DPMS	0.5W		
External Control		RS232C(1), RJ45(1), IR(1)		Power Off	0.5W		
USB		No		STANDARD(CERTIFICATION)	Safety	UL, cUL, CB scheme, TUV (TBD)	
Output				EMC	FCC Class "B", VCCI, C-tick, CE, KCC (TBD)		
Digital		Displayport(1)		ErP / Energy Star	Yes / NA (TBD)		
Analog		No		MEDIA PLAYER COMPATIBILITY	Slot PC compatible (optional)	No	
Audio		No		External Media player Attachable	No		
External Control		No		SOFTWARE COMPATIBILITY	SuperSign Elite-w lite	No	
Audio				ACCESSORY	Included	Remote Controller(including 2ea battery), Power Cord, HDMI Cable, IR Receiver, CD(Owner's Manual), ESG	
Auto Volume		No		Optional	No		
Balance		Yes					
Audio Power		20W (10W x 2)					
Speaker On/off		Yes					
Clear Voice II		Yes					
Sound mode		TBD					

※ Image may differ slightly from actual product. Specifications are subject to change without prior notice.

INTERFACE



DIMENSION (unit : mm)

